



CF-FG

TMG

Frigo Gasatore "Sottolavello"

Water Cooler & Carbonating system «Undersink»




**EROGATORE D'ACQUA MICROFILTRATA
FREDDA, FREDDA FRIZZANTE E
TEMPERATURA AMBIENTE**

*MICROFILTERED WATER DISPENSER
FOR COOL STILL, COOL SPARKLING AND
ROOM-TEMPERATURED WATER*

12

Frigo Gasatore "Sottolavello"

CF-FG

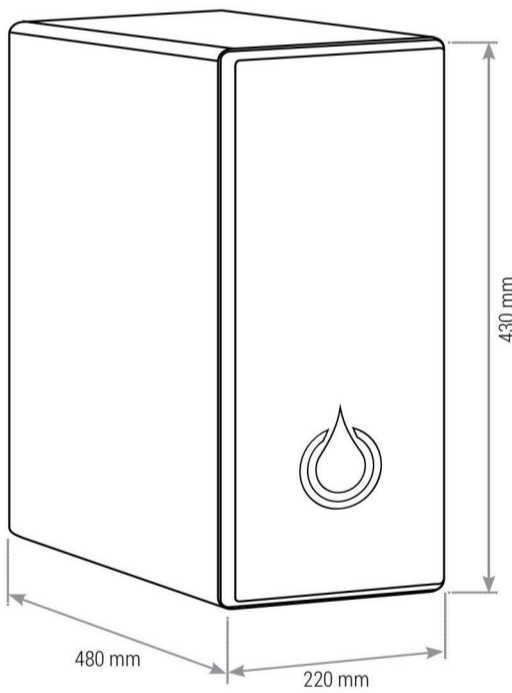

PROCESSO DI FILTRAZIONE

INGRESSO ACQUA ACQUEDOTTO

1° STADIO

Filtro dei sedimenti in polipropilene ad uso alimentare. Riduce limo e sedimenti.

2° STADIO

Filtro con carbone granulare di origine minerale addizionato con argento. Riduce odori, sapori e rilascia benefici ioni d'argento, con funzioni antibatteriche.

USCITA ACQUA RUBINETTO

FILTRATION PROCESS

WATER ENTRY WATER MAIN

1st STAGE

Sediment filter in polypropylene 5 micron for alimentary use. Reduces silt and sediment.

2nd STAGE

Granular Activated Carbon Filter of mineral origin with the addition of silver. Reduces odors, flavors and releases the benefits of silver ions.

WATER OUTLET FAUCET

CARATTERISTICHE TECNICHE

Alimentazione	220 V 50 Hz
Gas	R134A a norma CFC
Compressore	Hp ermetico con sistema di refrigerazione gas R134 a liquido
Raffreddamento	Refrigerazione acqua erogata banco di ghiaccio LT 6
Pompa	Pompa Booster 24 V
Dimensioni	220 x 430 x 480 mm (L-H-P)
Peso	15 kg

TECHNICAL FEATURES

Power supply	220V 50 Hz
Gas	R134A in accordance with CFC
Compressor	½ Hp hermetic with refrigeration system of gas R134 liquid
Cooling	Dispensed water cooling dry bank system LT 6
Pump	Booster Pump 24 V
Dimensions	220 x 430 x 480 mm (W-H-D)
Weight	15 kg

ACCESSORI OPZIONALI

OPTIONAL ACCESSORIES



RUBINETTO - FAUCET
Monocomando
a 5 vie - canna bassa
Single-control
Five-way mixer tap - low cane



RUBINETTO - FAUCET
Monocomando
a 5 vie - canna alta
Single-control
Five-way mixer tap - high cane

ACCESSORI IN DOTAZIONE

SUPPLIED ACCESSORIES



Kit di installazione
Installation Kit

ACCESSORI OPZIONALI

OPTIONAL ACCESSORIES



Riduttore per bombole
ricaricabili con
manometro di bassa
pressione assiale
Riducer for rechargeable
gas cylinders with axial low
pressure gauge



BOMBOLE 1-2-4 Kg
Ricaricabile
CO2 Gas cylinder
1-2-4 Kg Rechargeable



RUBINETTO - FAUCET

La Cristal Foss ha scelto la qualità
dei raccordi ad innesto rapido di
John Guest®

13